


Part # 10-430 Instructions

USE SOME FORM OF THREAD LOCKING COMPOUND ON THE FASTENERS. #242 BLUE LOC-TITE IS RECOMMENDED. By hand install the two isolators into the two slotted holes in the front of the Skid Plate. DO NOT use tools when performing this step to avoid damaging the isolators-i.e. **no screwdrivers!** Place a nylon washer on each front bolt. Insert the bolts w/nylon washers into the isolators.

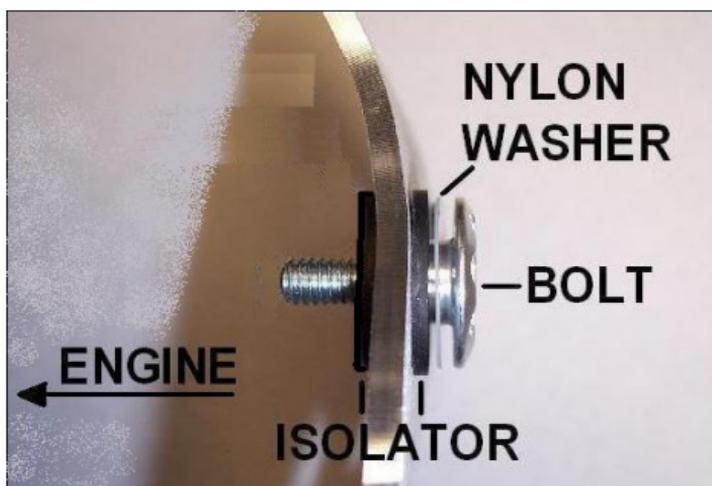

FRONT ASSEMBLY EXAMPLE

Place the one-piece front bracket on the frame rails in its approximate location.



REAR BRACKET CONFIGURATION

Install the rear brackets onto the skid plate (as shown) and thread the bolts in 4-5 turns. Position the the skid plate into place. Slide the front bracket into position and thread the bolts into the front bracket 4-5 turns. Confirm the rear brackets and the skid plate are in their correct locations by applying pressure to the skid plate so it's up against the frame rails. Confirm rear brackets are fully seated against and up over the rear cross member then tighten all four bolts to 9 to 12 ft/lbs.

